

COMPRESSED AIR FILTER



Salient Features


- Air Quality - As Per ISO 8573-1
- Warranty For Elements
- Coloured Elements for Specific Grade
- Low Pressure Drop



This comprehensive range of high efficiency coalescing filters will remove oil, dirt, odour and water from the compressed air supply, therefore offering complete protection to all equipment installed downstream.


TECHNICAL SPECIFICATION:

Filter Model	Capacity		Connection BSP
	cfm	m ³ /h	
WMF 004 (Grade)	40	68.5	1/2"
WMF 007 (Grade)	50	80	1/2"
WMF 010 (Grade)	75	120	3/4"
WMF 018 (Grade)	125	210	1"
WMF 030 (Grade)	200	335	1 1/2"
WMF 047 (Grade)	310	510	2"
WMF 070 (Grade)	450	750	2"
WMF 094 (Grade)	600	1000	3"
WMF 150 (Grade)	900	1500	4"
WMF 175 (Grade)	1200	2040	5"
WMF 240 (Grade)	1700	2760	6"

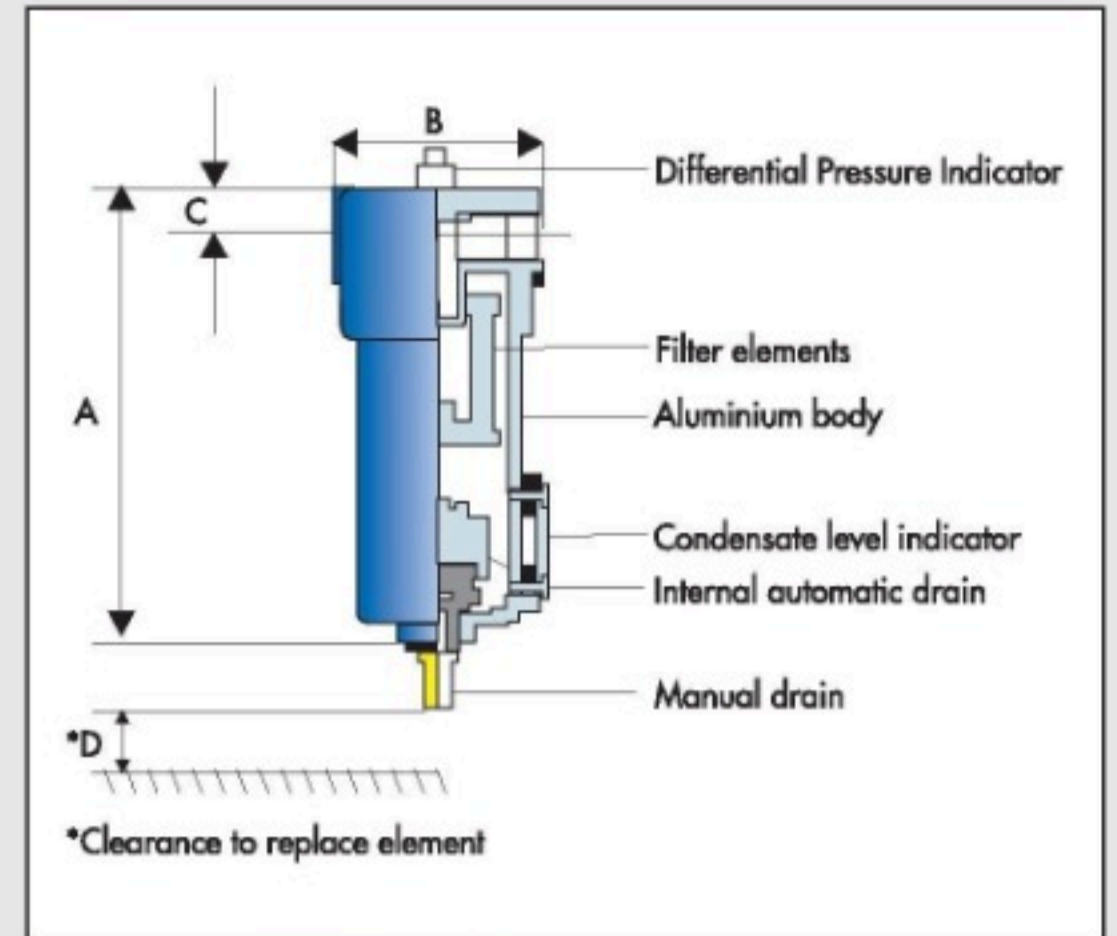

Accessories • Differential Pressure Gauge • Automatic Drain Valve

WMF GRADES	GP	ZP	ZO	ZC
Particle Removal	3 Micron	0.1 Micron	0.01 Micron	0.01 Micron
Oil Removal	—	0.1 mg/m ³	0.01 mg/m ³	0.005 mg/m ³
Nominal Initial Pressure Drop	0.03 bar g	0.05 bar g	0.06 bar g	0.12 bar g
Maximum Operating Temperature	80°C	80°C	80°C	80°C
Maximum Operating Pressure	30 bar g	30 bar g	30 bar g	30 bar g
Recommended Pressure Differential for element change	0.7 bar g	0.7 bar g	0.7 bar g	0.7 bar g
Media	Poly Propylene	Boro Silicate	Boro Silicate	Boro Silicate with impregnated activated carbon
Efficiency		99%	99.99%	99.9999%

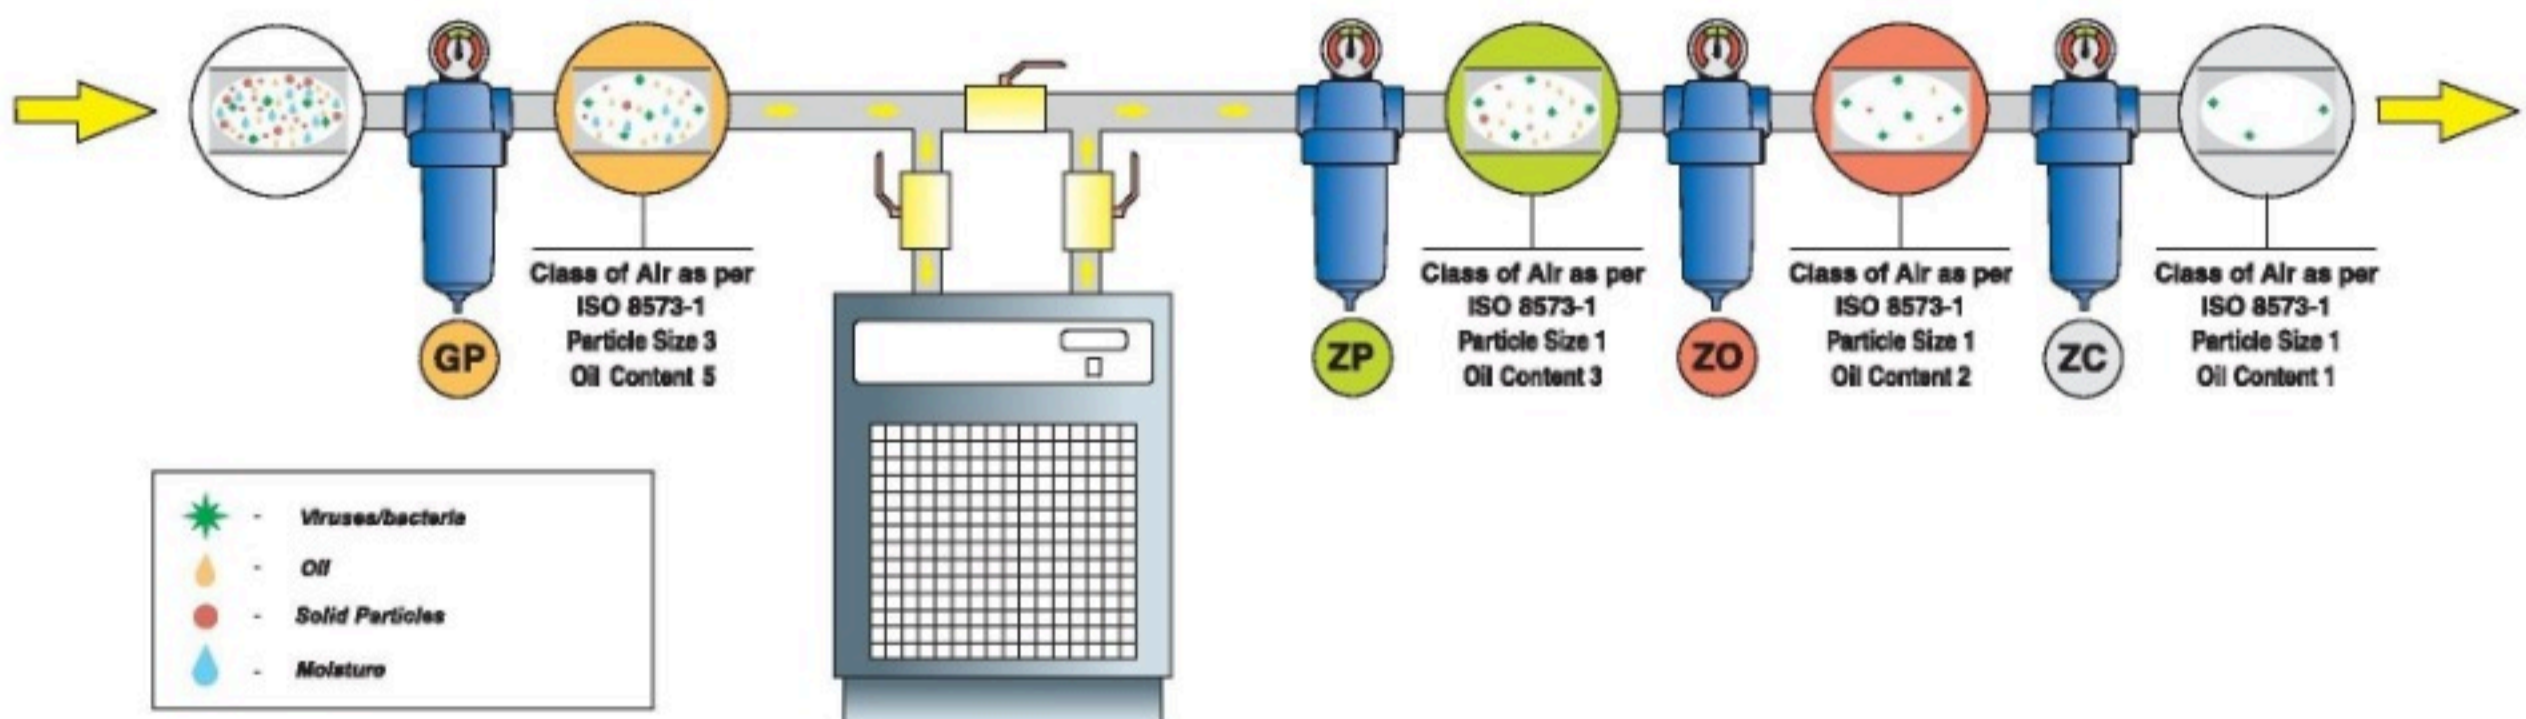

* Specifications are subject to change due to up gradation in all industries

Authorized Channel Partner :

Manufacturer

WIN EQUIPMENTS

SF No. 4/195 B, Kallangadu, Nadu Arasur

Arasur Post, Coimbatore, TN - 641 407, INDIA

m: +91 9597 228 969, +91 9597 228 978

e: info@winequipments.com, URL : www.winequipments.com

